

T50 Series (2.4 Male-ST to 2.4 Female-ST)

Test Cable, 50ohms, DC-50GHz

MiCable
www.micable.cn

T50-39-48-"L" (L: Length)

Maximum Ratings

Operating Temperature 23°C± 5°C


Storage Temperature -55°C to +85°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter	3.6mm	
Velocity of Propagation	74%	
Shielding Effectiveness	>90dB	
Power Handling at 40°C	1 GHz	125W
	12 GHz	37W
	18 GHz	29W
	26.5 GHz	22W
	40 GHz	18W
	50 GHz	15W
Min. Bending Radius	14.4mm	

Outline Drawing

Unit [mm]



Cable Cross Section

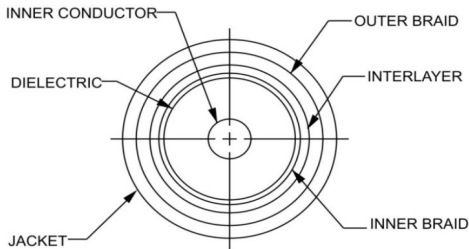

Features

- Ultra-wideband operation, DC to 50 GHz
- Ideal VSWR and measurement accuracy
- Excellent amplitude and phase stability vs flexure and shaking
- Reinforced connector, multilayer armor structure to protect cable against compression, tension, torsion and abrasion

Applications



- Lab and production line test
- 5G Massive MIMO and antenna OTA test
- 5G switch and attenuator matrices systems
- Phase array test systems
- RF/Microwave test systems

Electrical Specifications at 25°C

Freq. (GHz)	Length	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC - 18		18-26.5		26.5-40		40-50		DC - 18		18-26.5		26.5-40		40-50	
DC-50	2FT	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
	3FT	2.0	2.3	2.5	2.8	3.0	3.4	3.4	3.9	1.17	1.25	1.20	1.30	1.26	1.35	1.31	1.40
	1M	2.1	2.4	2.7	3.0	3.2	3.6	3.6	4.2								

Typical Performance Data (T50-39-48-1M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.10
1000	1.05	0.56
2000	1.04	0.78
4000	1.06	0.99
5000	1.07	1.08
6000	1.06	1.17
7000	1.09	1.29
8000	1.10	1.36
9000	1.11	1.47
10000	1.12	1.58
12000	1.13	1.71
18000	1.17	2.09
26500	1.20	2.68
40000	1.26	3.22
50000	1.31	3.63

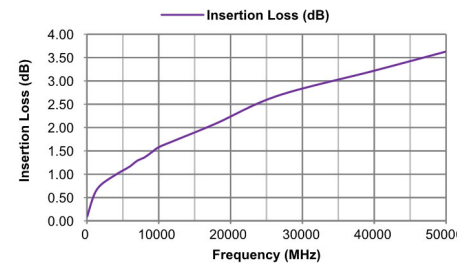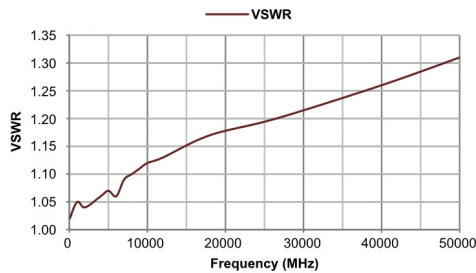

Cable Construction	
Inner Conductor	Silver Plated Copper, Solid
Dielectric	Solid PTFE
Inner Braid	Silver-Plated Copper Braid
Interlayer	PTFE
Outer Braid	Silver-Plated Copper Braid
Jacket	FEP

Connectors

- Nut, Stainless steel, Passivated
- Body, Stainless steel, Passivated
- Center contacts, Berillium Copper, Gold plated
- Dielectric, PEI, Natural

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse