


Revision	Description	ECN No.	Date
A	Initial Release	N/A	2020-02-20

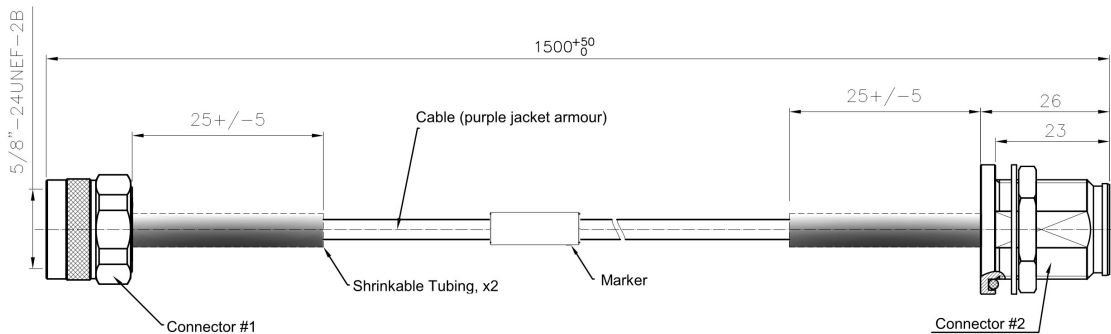

Specifications


- 1. ELECTRICAL**
- 1.1 Impedance: 50Ω
 - 1.2 Frequency Range: DC-6GHz
 - 1.3 Dielectric Withstanding Voltage: 1000V
 - 1.4 Insulation Resistance: 5000MΩ
 - 1.5 Insertion Loss: 2.2dB@6GHz max.
 - 1.6 VSWR: 1.25:1@6GHz max
 - 1.7 PIM: -165dBc max, tested at 1805-1880MHz frequency

- 2. MECHANICAL**
- 2.1 Min. Bending Radius: 50mm
 - 2.2 Durability: 500 cycles min.

- 3. MATERIAL**
- 3.1 Cable: IME02, Flexible Cable with Armor Φ10mm
 - 3.2 Connector #1: N Male
 - 3.2.1 Contact: Brass, Silver
 - 3.2.2 Insulator: PTFE
 - 3.2.3 Body: Brass, CuSnZn
 - 3.2.4 Coupling Nut: Brass, CuSnZn
 - 3.3 Connector #2: 4.3-10 Female
 - 3.3.1 Contact: Phosphor copper, Silver
 - 3.3.2 Insulator: PTFE
 - 3.3.3 Body: Brass, CuSnZn
 - 3.4 Shrinkable Tubing: Black, EVA, Φ12.7mm
 - 3.5 Marker: White, EVA, Φ12.7mm
- Content:
- Line 1: IME02-07-2Y-1.5M/VA3
 - Line 2: MICABLE YYMMXXXX (XXXX: Serial Number)

- 4. ENVIRONMENTAL**
- 4.1 2011/65/EU RoHS: Compliant
 - 4.2 Temperature Range: -40℃~+85℃

CUSTOMER OUTLINE DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. AND TOLERANCES ARE: DECIMALS: LENGTH: X: ±0.2 L<1M: 0/+5mm X.X: ±0.1 L≥1M: 0/+1% X.XX: ±0.05		PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO MICABLE AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF MICABLE	
DRAWN: CZB	DATE: 2020-02-20	 DESCRIPTION: IME02 CABLE ASSEMBLY, N MALE TO 4.3-10 FEMALE, 50 OHMS DWG. NO. IME02-07-2Y-1.5M/VA3 SCALE: NTS SHEET 1 OF 1	
REVIEWED:	DATE:		
APPROVED:	DATE:		
REFERENCE:			
FILE PATH:			